


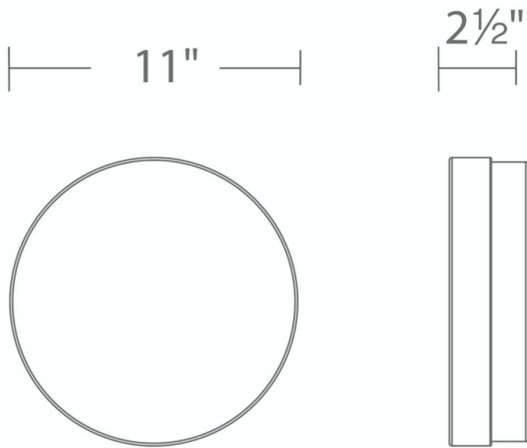

FM-2111

Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Circa

FM-2111

PRODUCT DESCRIPTION

This utilitarian family features a range of sizes to accommodate compact spaces like narrow hallways and stairwell landings as well as medium-sized rooms in office buildings and luxury homes. A thick, one-inch glass shade is pressed and sanded for pure whiteness, while a second insert is layered inside to extract the optimal amount of light from the high-performance LED modules.

FEATURES

- ACLED driverless technology
- 277V option available for special order.
- Etched pressed glass diffuser with interior ceramic glaze
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- 3CCT switch installs within the junction box
- Option to pre-select color temperature or adjust in the field
- FM-2109 doesn't qualified for Energy Star
- 0-10V dimming option available (special order), unit dimensions: 3.4" x 1.2" x 0.5" (model#LDS065M010AFE-LO1)

SPECIFICATIONS

Rated Life	54000 Hours
Standards	ETL, cETL,Damp Location Listed,Title 24 JA8: 2019 Compliant
Input	120 VAC,50/60Hz
Dimming	ELV: 100-10%,TRIAC: 100-10%
Mounting	Can be mounted on ceiling or wall in all orientations
Color Temp	3500K,3000K,2700K
CRI	90
Construction	Steel construction with etched opal glass

REPLACEMENT PARTS


RPL-GLA-4111 - Glass

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
FM-2111 11"	2700K	BK Black	27.6W	2625	1127
	2700K	TT Titanium	27.6W	2625	1127
	3000K	BK Black	27.6W	2625	1127
	3000K	TT Titanium	27.6W	2625	1127
	3500K	BK Black	27.6W	2625	1127
	3500K	TT Titanium	27.6W	2625	1127

Example: **FM-2111-35-TT**

•For 277V special order, add an "F" before the finish: FM-2111F-35-TT

For custom requests please contact customs@modernforms.com

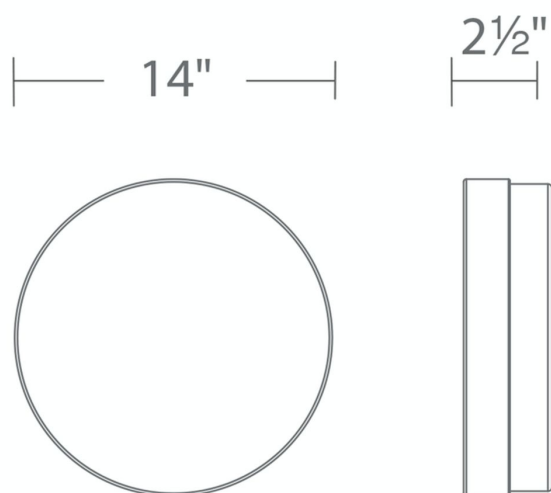

FM-2115


Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Circa

FM-2115

PRODUCT DESCRIPTION

This utilitarian family features a range of sizes to accommodate compact spaces like narrow hallways and stairwell landings as well as medium-sized rooms in office buildings and luxury homes. A thick, one-inch glass shade is pressed and sanded for pure whiteness, while a second insert is layered inside to extract the optimal amount of light from the high-performance LED modules.

FEATURES

- ACLED driverless technology
- Etched pressed glass diffuser with interior ceramic glaze
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- 3CCT switch installs within the junction box
- Option to pre-select color temperature or adjust in the field
- 0-10V dimming option available (special order), unit dimensions: 3.4" x 1.2" x 0.5" (model#LDS065M010AFE-LO1)
- FM-2109 doesn't qualified for Energy Star
- 277V option available for special order.

SPECIFICATIONS

Rated Life	54000 Hours
Standards	ETL, cETL,Damp Location Listed,Title 24 JA8: 2019 Compliant
Input	120 VAC,50/60Hz
Dimming	ELV: 100-10%,TRIAC: 100-10%
Mounting	Can be mounted on ceiling or wall in all orientations
Color Temp	3500K,3000K,2700K
CRI	90
Construction	Steel construction with etched opal glass

REPLACEMENT PARTS

RPL-GLA-4115 - Glass

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
FM-2115 14"	2700K	BK Black	29.9W	2997	1900
	2700K	TT Titanium	29.9W	2997	1900
	3000K	BK Black	30.3W	3135	1983
	3000K	TT Titanium	30.3W	3135	1983
	3500K	BK Black	29.9W	2990	1875
	3500K	TT Titanium	29.9W	2990	1875

Example: **FM-2115-35-TT**

•For 277V special order, add an "F" before the finish: FM-2115F-35-TT

For custom requests please contact customs@modernforms.com