




Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Swirly

PD-32507

PRODUCT DESCRIPTION

A glass globe adorned with dynamic swirling contours combines color temperature selectable LED light and high style in the luxe Swirly pendant. The pendant's smoked glass orb is suspended from a simple cord and is capped with metal finished on either end for an elegant touch.

FEATURES


- Driver concealed within the canopy
- Undulating smoked glass
- Spin-on round canopy with minimal hardware
- Thin, powered aircraft cables prove an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K

SPECIFICATIONS

Rated Life	50,000 Hours
Standards	ETL, cETL, Damp Location Listed, Title 24 JA8: 2019 Compliant
Input	120-277 VAC, 50/60Hz
Dimming	ELV: 100-10%, TRIAC: 100-10%
Color Temp	2700K, 3000K, 3500K, 4000K
CRI	90
Construction	Aluminum frame with mouth blown pattern clear and opal glass diffuser

REPLACEMENT PARTS

RPL-GLA-32507 - Glass
HDW-HY25-MA - Hardware Pack

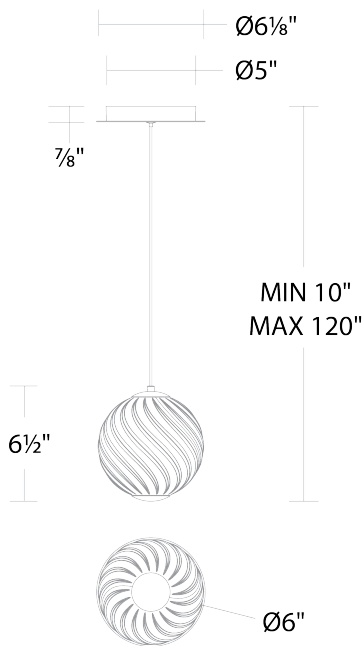

PD-32507

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
PD-32507 7"	2700K	SM/AB	7.8W	746	145
	2700K	SM/BN	7.8W	746	145
	3000K	SM/AB	7.8W	789	153
	3000K	SM/BN	7.8W	789	153
	3500K	SM/AB	7.8W	801	155
	3500K	SM/BN	7.8W	801	155
	4000K	SM/AB	7.8W	786	152
	4000K	SM/BN	7.8W	786	152

Example: **PD-32507-40-SM/BN**

For custom requests please contact customs@modernforms.com



Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Swirly

PD-32511

PRODUCT DESCRIPTION

A glass globe adorned with dynamic swirling contours combines color temperature selectable LED light and high style in the luxe Swirly pendant. The pendant's smoked glass orb is suspended from a simple cord and is capped with metal finished on either end for an elegant touch.

FEATURES


- Driver concealed within the canopy
- Undulating smoked glass
- Spin-on round canopy with minimal hardware
- Thin, powered aircraft cables prove an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K

SPECIFICATIONS

Rated Life	50,000 Hours
Standards	ETL, cETL, Damp Location Listed, Title 24 JA8: 2019 Compliant
Input	120-277 VAC, 50/60Hz
Dimming	ELV: 100-10%, TRIAC: 100-10%
Color Temp	2700K, 3000K, 3500K, 4000K
CRI	90
Construction	Aluminum frame with mouth blown pattern clear and opal glass diffuser

REPLACEMENT PARTS

RPL-GLA-32511 - Glass
HDW-HY25-MA - Hardware Pack

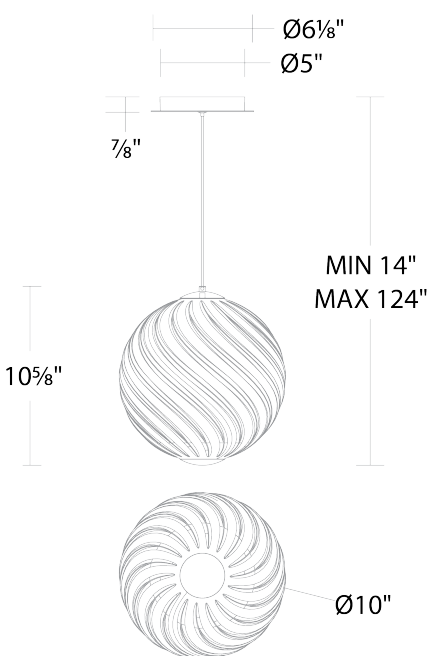

PD-32511

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
PD-32511 11"	2700K	SM/AB	14.6W	1624	331
	2700K	SM/BN	14.6W	1624	331
	3000K	SM/AB	14.6W	1685	343
	3000K	SM/BN	14.6W	1685	343
	3500K	SM/AB	14.6W	1681	337
	3500K	SM/BN	14.6W	1681	337
	4000K	SM/AB	14.6W	1624	324
	4000K	SM/BN	14.6W	1624	324

Example: **PD-32511-40-SM/BN**

For custom requests please contact customs@modernforms.com