


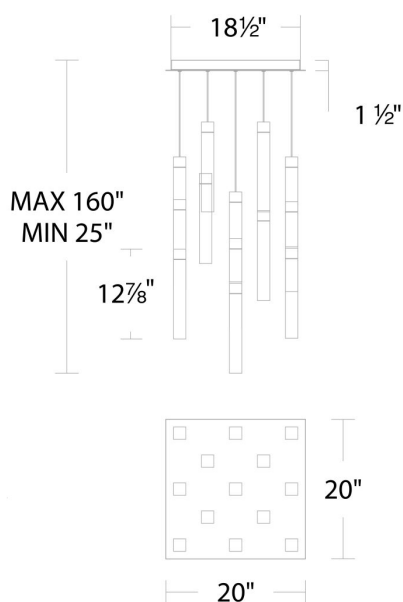

PD-78013S


Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Minx

PD-78013S

PRODUCT DESCRIPTION

Artisanally sparkling pendants are installed in various arrangements to create an artful statement as well as deliver ample lighting to spaces throughout a home or business.

FEATURES

- Driver concealed within the canopy
- Artisanal reclaimed K5 crystal shade
- Thin powered aircraft cables provide an ultra clean look for adjustable suspension height
- NEC CODE (314.24) requires that ceiling outlet boxes in the U.S. support up to 50 lbs.
- This fixture exceeds 50 lbs. and must be installed using a U.L. listed outlet box approved for up to 75 lbs., 125 lbs., and 175 lbs. respectfully, or supported independently of the outlet box

SPECIFICATIONS

Rated Life	55000 Hours
Standards	ETL, cETL,Damp Location Listed
Input	120-277 VAC,50/60Hz
Dimming	ELV, 0-10V, TRIAC
Color Temp	3000K
CRI	90
Construction	Steel body with K5 crystal fused acrylic


REPLACEMENT PARTS

RPL-GLA-78013 - Inner glass

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
PD-78013S 20" - 13 Lights	3000K 90	62W	3146	AB Aged Brass
	3000K 90	62W	3146	AN Antique Nickel

Example: **PD-78013S-AN**

For custom requests please contact customs@modernforms.com

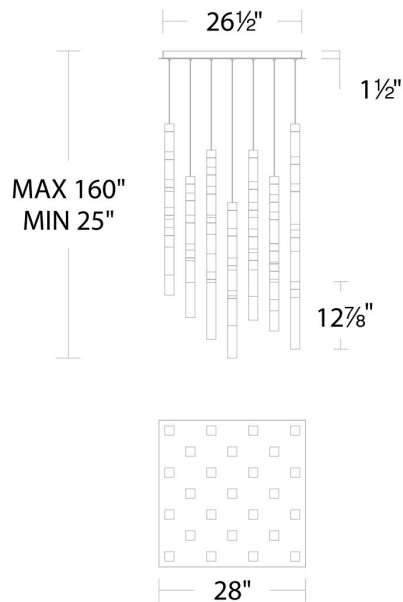

PD-78025S

Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Minx

PD-78025S

PRODUCT DESCRIPTION

Artisanally sparkling pendants are installed in various arrangements to create an artful statement as well as deliver ample lighting to spaces throughout a home or business.

FEATURES

- Driver concealed within the canopy
- Artisanal reclaimed K5 crystal shade
- Thin powered aircraft cables provide an ultra clean look for adjustable suspension height
- NEC CODE (314.24) requires that ceiling outlet boxes in the U.S. support up to 50 lbs.
- This fixture exceeds 50 lbs. and must be installed using a U.L. listed outlet box approved for up to 75 lbs., 125 lbs., and 175 lbs. respectfully, or supported independently of the outlet box

SPECIFICATIONS

Rated Life	55000 Hours
Standards	ETL, cETL,Damp Location Listed
Input	120-277 VAC,50/60Hz
Dimming	ELV, 0-10V, TRIAC
Color Temp	3000K
CRI	90
Construction	Steel body with K5 crystal fused acrylic


REPLACEMENT PARTS

RPL-GLA-78013 - Inner glass

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
PD-78025S 28" - 25 Lights	3000K 90	120W	6050	AB Aged Brass
	3000K 90	120W	6050	AN Antique Nickel

Example: **PD-78025S-AN**

For custom requests please contact customs@modernforms.com

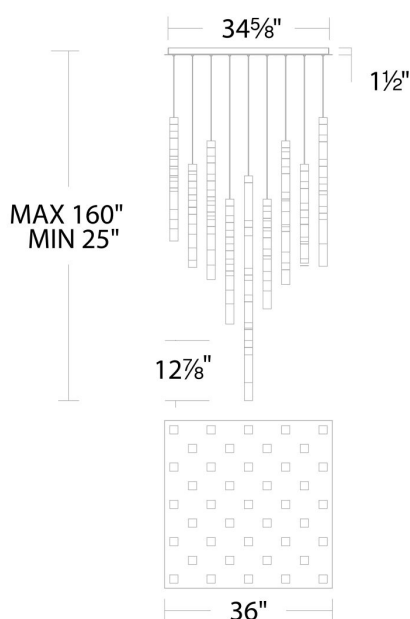

PD-78041S


Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Minx

PD-78041S

PRODUCT DESCRIPTION

Artisanally sparkling pendants are installed in various arrangements to create an artful statement as well as deliver ample lighting to spaces throughout a home or business.

FEATURES

- Driver concealed within the canopy
- Artisanal reclaimed K5 crystal shade
- Thin powered aircraft cables provide an ultra clean look for adjustable suspension height
- NEC CODE (314.24) requires that ceiling outlet boxes in the U.S. support up to 50 lbs.
- This fixture exceeds 50 lbs. and must be installed using a U.L. listed outlet box approved for up to 75 lbs., 125 lbs., and 175 lbs. respectfully, or supported independently of the outlet box

SPECIFICATIONS

Rated Life	55000 Hours
Standards	ETL, cETL,Damp Location Listed
Input	120-277 VAC,50/60Hz
Dimming	ELV, 0-10V, TRIAC
Color Temp	3000K
CRI	90
Construction	Steel body with K5 crystal fused acrylic

REPLACEMENT PARTS

RPL-GLA-78013 - Inner glass

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
PD-78041S 36" - 41 Lights	3000K 90 3000K 90	197W 197W	9922 9922	AB Aged Brass AN Antique Nickel

Example: **PD-78041S-AN**

For custom requests please contact customs@modernforms.com