




Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Double Bubble

PD-82014L

PRODUCT DESCRIPTION

Like a minimalist take on a crystal ball, these pendant's laser etched orbs are installed in various arrangements on one canopy to create an artful statement as well as deliver ample lighting to spaces throughout a home or business.

FEATURES


- Driver concealed within the canopy
- Laser etched K9 crystal spheres
- Thin powered aircraft cables provide an ultra clean look for adjustable suspension height
- NEC CODE (314.24) requires that ceiling outlet boxes in the U.S. support up to 50 lbs.
- This fixture in the 14 and 23 light format exceed 50 lbs. and must be installed using a U.L. listed outlet box approved for up to 100 and 175 lbs. or supported independently of the outlet box

SPECIFICATIONS

Rated Life	55000 Hours
Standards	ETL, cETL, Damp Location Listed
Input	120-277 VAC, 50/60Hz
Dimming	ELV, 0-10V, TRIAC
Color Temp	3000K
CRI	90
Construction	Die cast aluminum body with laser etched glass shade

REPLACEMENT PARTS

RPL-GLA-82005 - Glass

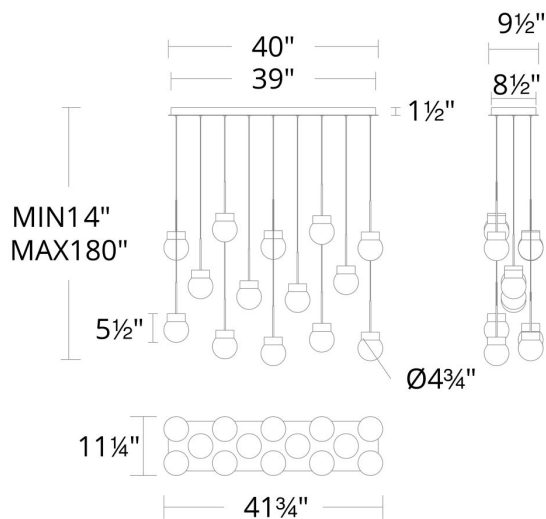

PD 82014L

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
PD-82014L 40" - 14 Lights	3000K 90 3000K 90	41W 41W	3556 3556	AB Aged Brass BK Black

Example: **PD-82014L-BK**

For custom requests please contact customs@modernforms.com



Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Double Bubble

PD-82023L

PRODUCT DESCRIPTION

Like a minimalist take on a crystal ball, these pendant's laser etched orbs are installed in various arrangements on one canopy to create an artful statement as well as deliver ample lighting to spaces throughout a home or business.

FEATURES


- Driver concealed within the canopy
- Laser etched K9 crystal spheres
- Thin powered aircraft cables provide an ultra clean look for adjustable suspension height
- NEC CODE (314.24) requires that ceiling outlet boxes in the U.S. support up to 50 lbs.
- This fixture in the 14 and 23 light format exceed 50 lbs. and must be installed using a U.L. listed outlet box approved for up to 100 and 175 lbs. or supported independently of the outlet box

SPECIFICATIONS

Rated Life	55000 Hours
Standards	ETL, cETL, Damp Location Listed
Input	120-277 VAC, 50/60Hz
Dimming	ELV, 0-10V, TRIAC
Color Temp	3000K
CRI	90
Construction	Die cast aluminum body with laser etched glass shade

REPLACEMENT PARTS

RPL-GLA-82005 - Glass

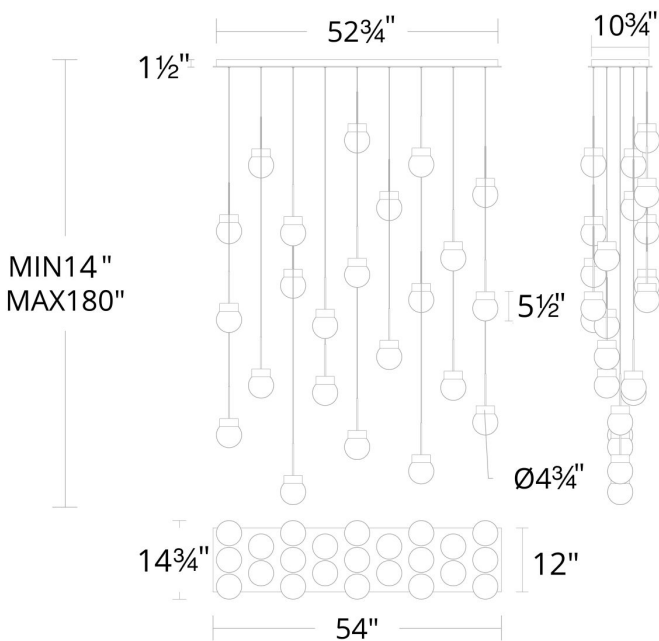

PD-82023L

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
PD-82023L 54" - 23 Lights	3000K 90 3000K 90	70W 70W	5968 5968	AB Aged Brass BK Black

Example: **PD-82023L-BK**

For custom requests please contact customs@modernforms.com