




Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Ribeye

WS-50528

PRODUCT DESCRIPTION

A ribbed glass tube intersected by a grooved column creates the elegant Ribeye wall sconce. Textured, 3000K illumination from an integrated LED filament enhances the space. Mount the light horizontally or vertically as desired.

FEATURES


- Driver concealed within the canopy
- Extruded reeded glass
- Grooved pattern frame

SPECIFICATIONS

Rated Life	50,000 Hours
Standards	ETL, cETL,Damp Location Listed
Input	120-277 VAC,50/60Hz
Dimming	ELV: 100-10%,TRIAC: 100-10%
Mounting	Can be mounted on wall in all orientations
Color Temp	3000K
CRI	90
Construction	Aluminum body with ribbed glass and silicon diffuser

REPLACEMENT PARTS

RPL-GLA-50528-BN - Extruded Glass with cap
RPL-GLA-50528-AB - Extruded Glass with cap

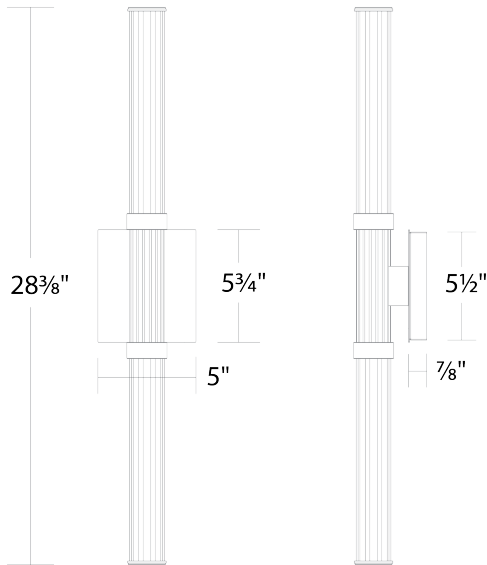

WS-50528

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-50528 28"	3000K 3000K	AB Aged Brass BN Brushed Nickel	13.8W 13.8W	996 996	720 720

Example: **WS-50528-BN**

For custom requests please contact customs@modernforms.com