

Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Elessar

WS-66641

PRODUCT DESCRIPTION

A triumphant staff of silver and light, Elessar makes a dramatic statement wherever you mount it. Seeded crystal sparkles with light and casts a captivating spell, while LEDs positioned in the back of the polished stainless steel body create fine indirect light against the wall for a fuller illumination. Energy-efficient and long-lasting, thanks to cutting-edge LEDs and a timeless design, Elessar is a distinctive sconce for modern hotels, luxury condos and midtown office buildings.

FEATURES

- Driver installed within the Junction Box, driver dimension: 2.8" x 1.3" x 1.2"
- Polished 304 stainless steel hardware, clear seeded crystal
- Upward and indirect illumination

SPECIFICATIONS

Rated Life	52000 Hours
Standards	ETL, cETL, Damp Location Listed
Input	120-277 VAC, 50/60Hz
Driver Dimension	2.8" x 1.3" x 1.2"
Dimming	ELV: 100-5%, TRIAC: 100-10%
Color Temp	3000K
CRI	90
Construction	Aluminum and Clear seeded glass

REPLACEMENT PARTS

RPL-GLA-66641 - Glass
HDW-66641-ELESSAR - Hardware Pack

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-66641 70"	3000K	PN Polished Nickel	42.8W	1857	1817

Example: **WS-66641-PN**

For custom requests please contact customs@modernforms.com



Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Elessar

WS-66734

PRODUCT DESCRIPTION

A triumphant staff of silver and light, Elessar makes a dramatic statement wherever you mount it. Seeded crystal sparkles with light and casts a captivating spell, while LEDs positioned in the back of the polished stainless steel body create fine indirect light against the wall for a fuller illumination. Energy-efficient and long-lasting, thanks to cutting-edge LEDs and a timeless design, Elessar is a distinctive sconce for modern hotels, luxury condos and midtown office buildings.

FEATURES


- Driver installed within the Junction Box, driver dimension: 2.8" x 1.3" x 1.2"
- Polished 304 stainless steel hardware, clear seeded crystal
- Upward and indirect illumination

SPECIFICATIONS

Rated Life	52000 Hours
Standards	ETL, cETL, Damp Location Listed
Input	120-277 VAC, 50/60Hz
Driver Dimension	2.8" x 1.3" x 1.2"
Dimming	ELV: 100-5%, TRIAC: 100-10%
Color Temp	3000K
CRI	90
Construction	Aluminum and Clear seeded glass

REPLACEMENT PARTS

RPL-GLA-66734-01 - Glass

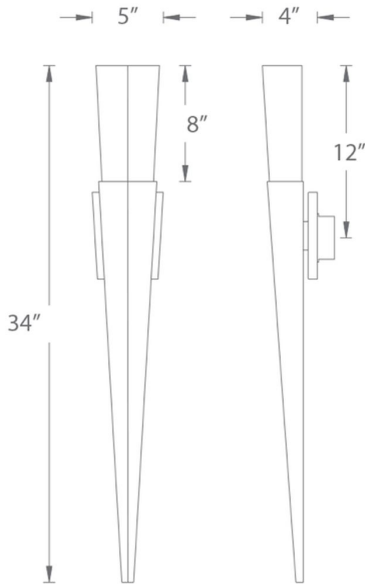

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-66734 34"	3000K	PN Polished Nickel	30.5W	1525	1507

Example: **WS-66734-PN**

For custom requests please contact customs@modernforms.com