



Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Mako

WS-W18122

PRODUCT DESCRIPTION


Sleek and striking. Modern lighting designed at just the right angle. This low-profile wall sconce projects a blade of light on the wall behind to feature its own silhouette and a second blade cast downward to light the path below. Defined by an angular upright, Mako enhances both interior and exterior locations as a wet listed, ADA Compliant architectural luminaire. Customize your color temperature from three choices.

FEATURES

- Driver concealed within the canopy
- Down and indirect illumination
- Built in color temperature adjustability. Switch from 3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- Not recommended for dimming @220V

SPECIFICATIONS

Rated Life	50,000 Hours
Standards	ETL, cETL, Wet Location Listed
Input	120-277 VAC, 50/60Hz
Dimming	ELV
Mounting	Can be mounted on wall vertically or upside down
Color Temp	4000K, 3000K, 3500K
CRI	90
Construction	Extruded aluminum body with white silk screen glass

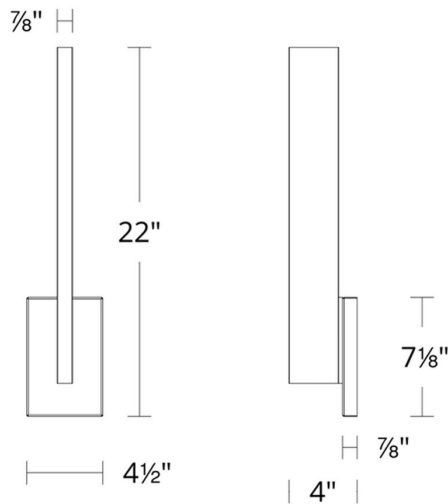

WS-W18122

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-W18122 22"	3000K	AL Brushed Aluminum	16.7W	1500	364
	3000K	BK Black	16.7W	1500	364
	3500K	AL Brushed Aluminum	16.7W	1500	434
	3500K	BK Black	16.7W	1500	434
	4000K	AL Brushed Aluminum	16.7W	1500	410
	4000K	BK Black	16.7W	1500	410

Example: **WS-W18122-40-BK**

For custom requests please contact customs@modernforms.com