



Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Hiline

WS-W2308

PRODUCT DESCRIPTION

Like so many minimalist designs, Hiline rewards those who take a closer look. Its clean, bracket-like shape is detailed with fine horizontal ridges for visual texture—that really comes to life when the lights come on. Factory-sealed housing protects the high-performance LED modules, which work alongside the weather-resistant finish to earn its wet-rated status. Ideal applications include multi-tiered decks, stone patios and entranceways to luxury hotels and homes.

FEATURES


- 277V option available for special order.
- ACLED driverless technology
- Etched glass shield
- IDA Dark Sky compliant

SPECIFICATIONS

Rated Life	50,000 Hours
Standards	ETL, cETL, Wet Location Listed, Dark Sky Friendly
Input	120 VAC, 50/60Hz
Dimming	ELV
Color Temp	3000K
CRI	90
Construction	Aluminum with etched glass light shield

REPLACEMENT PARTS

RPL-GLA-2308 - Glass

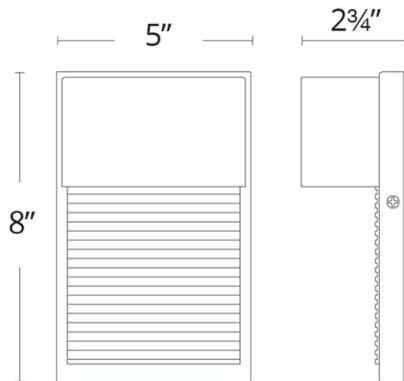


WS-W2308

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-W2308 8"	3000K	BK Black	8W	280	245

Example: **WS-W2308-BK**

•For 277V special order, add an "F" before the finish: WS-W2308F-BK

For custom requests please contact customs@modernforms.com

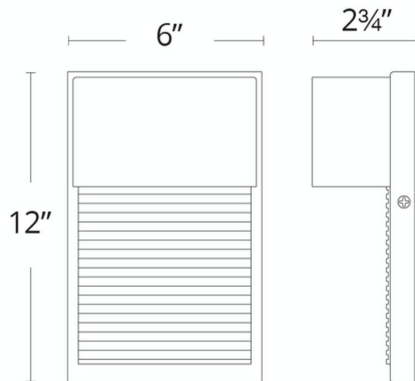

WS-W2312

Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Hiline

WS-W2312

PRODUCT DESCRIPTION

Like so many minimalist designs, Hiline rewards those who take a closer look. Its clean, bracket-like shape is detailed with fine horizontal ridges for visual texture—that really comes to life when the lights come on. Factory-sealed housing protects the high-performance LED modules, which work alongside the weather-resistant finish to earn its wet-rated status. Ideal applications include multi-tiered decks, stone patios and entranceways to luxury hotels and homes.

FEATURES

- 277V option available for special order.
- ACLED driverless technology
- Etched glass shield
- IDA Dark Sky compliant

SPECIFICATIONS

Rated Life	50,000 Hours
Standards	ETL, cETL, Wet Location Listed, Dark Sky Friendly
Input	120 VAC, 50/60Hz
Dimming	ELV
Color Temp	3000K
CRI	90
Construction	Aluminum with etched glass light shield

REPLACEMENT PARTS

RPL-GLA-2312 - Glass

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-W2312 12"	3000K	BK Black	8W	280	245

Example: **WS-W2312-BK**

•For 277V special order, add an "F" before the finish: WS-W2312F-BK

For custom requests please contact customs@modernforms.com