

WS-W30418

Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Heliograph

WS-W30418

PRODUCT DESCRIPTION

Fusion of metal and light. A thick bar of acrylic is bisected by a wide band, delivering clear illumination from integrated LEDs.

FEATURES

- Driver concealed within the canopy
- Up, down, and ambient illumination
- Clear acrylic blocks are softened with an etched facade to diffuse light
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- Patented design
- Not recommended for dimming @220V

SPECIFICATIONS

Rated Life	50,000 Hours
Standards	ETL, cETL, Wet Location Listed, IP65
Input	120-277 VAC, 50/60Hz
Dimming	ELV: 100-10%, TRIAC: 100-10%
Mounting	Can be mounted on wall in all orientations
Color Temp	3000K, 2700K, 3500K, 4000K
CRI	90
Construction	Die cast aluminum body with acrylic shade

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-W30418 18"	2700K	BK Black	10.2W	168	126
	3000K	BK Black	10.2W	168	130
	3500K	BK Black	10.2W	168	133
	4000K	BK Black	10.2W	168	135

Example: **WS-W30418-40-BK**

For custom requests please contact customs@modernforms.com



Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Heliograph

WS-W30424

PRODUCT DESCRIPTION


Fusion of metal and light. A thick bar of acrylic is bisected by a wide band, delivering clear illumination from integrated LEDs.

FEATURES

- Driver concealed within the canopy
- Up, down, and ambient illumination
- Clear acrylic blocks are softened with an etched facade to diffuse light
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- Patented design
- Not recommended for dimming @220V

SPECIFICATIONS

Rated Life	50,000 Hours
Standards	ETL, cETL, Wet Location Listed, IP65
Input	120-277 VAC, 50/60Hz
Dimming	ELV: 100-10%, TRIAC: 100-10%
Mounting	Can be mounted on wall in all orientations
Color Temp	3000K, 2700K, 3500K, 4000K
CRI	90
Construction	Die cast aluminum body with acrylic shade

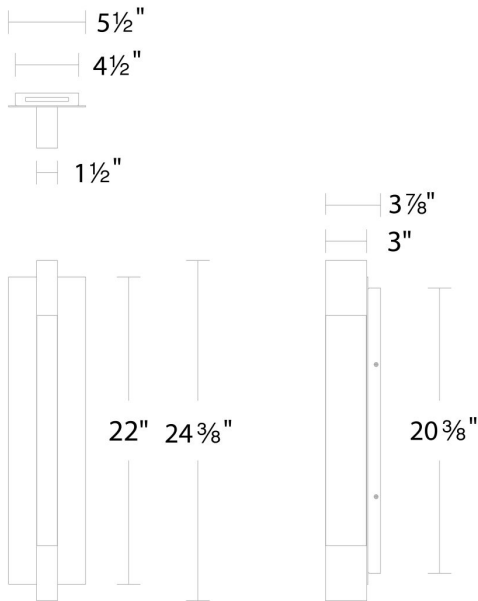

WS-W30424

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-W30424 24"	2700K	BK Black	13.9W	288	187
	3000K	BK Black	13.9W	288	196
	3500K	BK Black	13.9W	288	204
	4000K	BK Black	13.9W	288	205

Example: **WS-W30424-40-BK**

For custom requests please contact customs@modernforms.com



Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Heliograph

WS-W30432

PRODUCT DESCRIPTION




Fusion of metal and light. A thick bar of acrylic is bisected by a wide band, delivering clear illumination from integrated LEDs.

FEATURES

- Driver concealed within the canopy
- Up, down, and ambient illumination
- Clear acrylic blocks are softened with an etched facade to diffuse light
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- Patented design
- Not recommended for dimming @220V

SPECIFICATIONS

Rated Life	50,000 Hours
Standards	ETL, cETL, Wet Location Listed, IP65
Input	120-277 VAC, 50/60Hz
Dimming	ELV: 100-10%, TRIAC: 100-10%
Mounting	Can be mounted on wall in all orientations
Color Temp	3000K, 2700K, 3500K, 4000K
CRI	90
Construction	Die cast aluminum body with acrylic shade



WS-W30432

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-W30432 32"	2700K	BK Black	18.9W	355	258
	3000K	BK Black	18.9W	355	276
	3500K	BK Black	18.9W	355	287
	4000K	BK Black	18.9W	355	285

Example: **WS-W30432-40-BK**

For custom requests please contact customs@modernforms.com