



Project:

Location:

Fixture Type:

Catalog Number:

**AVAILABLE FINISHES:**



## Sabre

WS-W81619

**PRODUCT DESCRIPTION**


On the cutting edge of technology and aesthetics, bath lighting can now be both refined and robust. A sleek look with a durable and optically enhanced co-extruded acrylic diffuser,

**FEATURES**

- Driver installed within the Junction Box, driver dimension: 2.8" x 1.3" x 1.2"
- Extruded acrylic diffuser
- Conversion plate included for 4" junction box
- WS-W81612 doesn't qualified for Energy Star

**SPECIFICATIONS**

|                  |                                                             |
|------------------|-------------------------------------------------------------|
| Rated Life       | 54000 Hours                                                 |
| Standards        | ETL, cETL, Wet Location Listed, IP65                        |
| Input            | 120-277 VAC, 50/60Hz                                        |
| Driver Dimension | 2.8" x 1.3" x 1.2"                                          |
| Dimming          | ELV                                                         |
| Mounting         | Can be mounted on wall in all orientations                  |
| Color Temp       | 3500K                                                       |
| CRI              | 90                                                          |
| Construction     | Aluminum 1/4" thick co-extruded clear white optical acrylic |

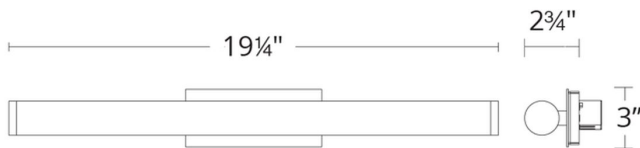

WS-W81619

| Model & Size  | Color Temp | Finish              | LED Watts | LED Lumens | Delivered Lumens |
|---------------|------------|---------------------|-----------|------------|------------------|
| WS-W81619 19" | 3500K      | AL Brushed Aluminum | 15.3W     | 1342       | 1267             |

Example: **WS-W81619-AL**

For custom requests please contact [customs@modernforms.com](mailto:customs@modernforms.com)



Project:

Location:

Fixture Type:

Catalog Number:

**AVAILABLE FINISHES:**



## Sabre

WS-W81625

**PRODUCT DESCRIPTION**


On the cutting edge of technology and aesthetics, bath lighting can now be both refined and robust. A sleek look with a durable and optically enhanced co-extruded acrylic diffuser,

**FEATURES**

- Driver installed within the Junction Box, driver dimension: 2.8" x 1.3" x 1.2"
- Extruded acrylic diffuser
- Conversion plate included for 4" junction box
- WS-W81612 doesn't qualified for Energy Star

**SPECIFICATIONS**

|                  |                                                             |
|------------------|-------------------------------------------------------------|
| Rated Life       | 54000 Hours                                                 |
| Standards        | ETL, cETL, Wet Location Listed, IP65                        |
| Input            | 120-277 VAC, 50/60Hz                                        |
| Driver Dimension | 2.8" x 1.3" x 1.2"                                          |
| Dimming          | ELV                                                         |
| Mounting         | Can be mounted on wall in all orientations                  |
| Color Temp       | 3500K                                                       |
| CRI              | 90                                                          |
| Construction     | Aluminum 1/4" thick co-extruded clear white optical acrylic |

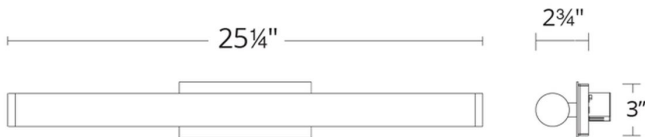

WS-W81625

| Model & Size  | Color Temp | Finish              | LED Watts | LED Lumens | Delivered Lumens |
|---------------|------------|---------------------|-----------|------------|------------------|
| WS-W81625 25" | 3500K      | AL Brushed Aluminum | 20.2W     | 1828       | 1730             |

Example: **WS-W81625-AL**

For custom requests please contact [customs@modernforms.com](mailto:customs@modernforms.com)