

WAC LIGHTING

Lotos R 4"

Adjustable Downlight 5CCT

Model	Beam	Color Temp & CRI	Lumens	CBCP	Finish
R4ERA2R	W 50	9CS 2700K/3000K/3500K/4000K/5000K - 90	740 775	733 750	BK Black WT White

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Example: **R4ERA2R-W9CS-BK**

FEATURES


- 5-CCT Switchable between 2700K and 5000K
- Multiple LED array for uniform illumination
- Rotatable multi-axis gimbal ring
- Driver included
- 5 year warranty

SPECIFICATIONS


Construction	Steel with frosted TIR lens
Power:	9W
Input:	120 -277 VAC,50/60Hz
Dimming:	ELV: 100-5% , TRIAC: 100-5%
Light Source:	Integrated LED
Lens:	Translucent acrylic diffuser
Rated Life:	50,000 Hours
Mounting:	Heavy gauge retention clips secures fixture to ceiling
Cut Out:	4"
Finish:	Electrostatically powder coated White, Electrostatically powder coated Black
Ceiling Thickness:	1/2" - 1"
Operating Temp:	-4°F to 104°F (-20°C to 40°C)
Standards:	ETL, cETL, Wet Location Listed, Title 24 JA8 Compliant, Airtight, IC



FINISHES:



LINE DRAWING

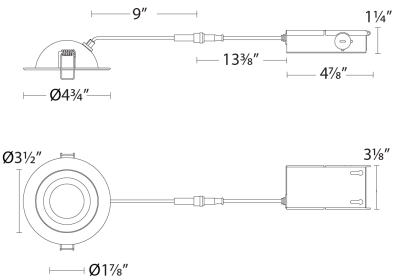

Lotos R 4" Adjustable
R4ERA2R-W930-WT

WAC LIGHTING

Lotos R 4"

Adjustable Downlight 5CCT

Fixture Type:

Catalog Number:

Project:

Location:

ACCESSORIES

	Model	Description	Finish
	RER-FRAME	LOTOS NEW CONST FRAME FOR 4IN AND 6IN	