

WAC LIGHTING

Parallax

Bathroom Vanity & Sconce

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-73118 18"	2700K/3000K/3500K	BK Black BN Brushed Nickel CH Chrome	6W	271	189

Example: **WS-73118-CH**

For custom requests please contact customs@wacighting.com

DESCRIPTION

Straight forward and honest. Unparalleled

FEATURES


- Fontlight illumination
- Conversion plate included to accommodate 4" junction box
- 3CCT (2700K/3000K/3500K) selectable switch
- Trimless spackle cover available for 4" square junction box recessed in drywall thicknesses of 1/2", 5/8", 1", and 1-1/4"; accessory not included and can be ordered separately (model# CP-TL-WT)
- Option to pre-select color temperature or adjust in the field
- ACLED driverless technology
- 5 year warranty

SPECIFICATIONS


Color Temp:	2700K/3000K/3500K
Input:	120 VAC, 50/60Hz
CRI	90
Dimming:	ELV: 100-10% , TRIAC: 100-10%
Rated Life:	54,000 Hours
Mounting:	Can be mounted on wall in all orientations
Standards:	ETL, cETL, Title 24 JA8 Compliant, ADA, Damp Location Listed
Construction	Aluminum body, PC diffuser



FINISHES:



LINE DRAWING

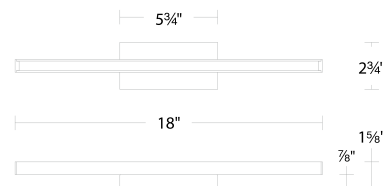

WS-73118

WAC LIGHTING

Parallax

Bathroom Vanity & Sconce

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-73124 24"	2700K/3000K/3500K	BK Black BN Brushed Nickel CH Chrome	6W	393	295

Example: **WS-73124-CH**

For custom requests please contact customs@wacighting.com

DESCRIPTION

Straight forward and honest. Unparalleled

FEATURES


- Fontlight illumination
- Conversion plate included to accommodate 4" junction box
- 3CCT (2700K/3000K/3500K) selectable switch
- Trimless spackle cover available for 4" square junction box recessed in drywall thicknesses of 1/2", 5/8", 1", and 1-1/4"; accessory not included and can be ordered separately (model# CP-TL-WT)
- Option to pre-select color temperature or adjust in the field
- ACLED driverless technology
- 5 year warranty




SPECIFICATIONS

Color Temp:	2700K/3000K/3500K
Input:	120 VAC, 50/60Hz
CRI	90
Dimming:	ELV: 100-10% , TRIAC: 100-10%
Rated Life:	54,000 Hours
Mounting:	Can be mounted on wall in all orientations
Standards:	ETL, cETL, Title 24 JA8 Compliant, ADA, Damp Location Listed
Construction	Aluminum body, PC diffuser

FINISHES:



LINE DRAWING

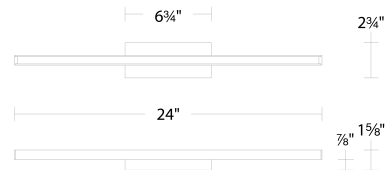

WS-73124