



Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Ansel

PL-36518

PRODUCT DESCRIPTION

With its sleek, understated design, the Ansel picture light enhances your artwork without drawing attention to itself. The slim, tubular head rotates for precise lighting, allowing you to easily position the beam to perfectly illuminate your chosen piece with color temperature selectable LEDs. "

FEATURES


- Driver concealed within the canopy
- Rotatable light bar up to 70 degree to direct light as desired
- Conversion plate included to accommodate 4" junction box
- Trimless spackle cover available for 4" square junction box recessed in drywall thicknesses of 1/2", 5/8", 1", and 1-1/4"; accessory not included and can be ordered separately (model# MKCP-3040-WT)
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K

SPECIFICATIONS

Rated Life	50,000 Hours
Standards	ETL, cETL, Damp Location Listed
Input	120-277 VAC, 50/60Hz
Dimming	ELV: 100-10%, TRIAC: 100-10%
Color Temp	2700K, 3000K, 3500K, 4000K
CRI	90
Construction	Aluminum frame with acrylic diffuser

REPLACEMENT PARTS

HDW-SY25-MA - Hardware Pack
N/A - Hardware Pack

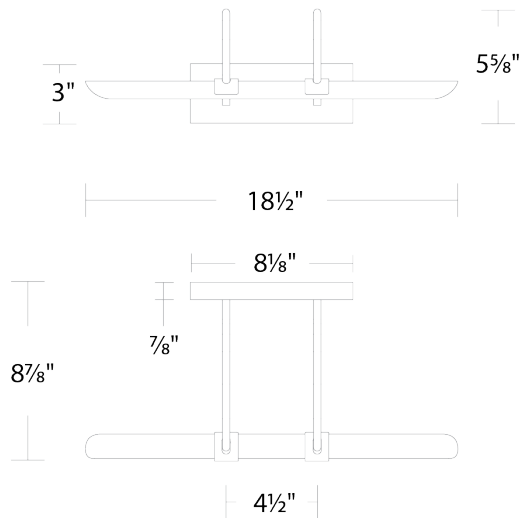


PL-36518

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
PL-36518 19"	2700K	AB Aged Brass	15.9W	1100	846
	2700K	BK Black	15.9W	1100	846
	3000K	AB Aged Brass	15.9W	1100	919
	3000K	BK Black	15.9W	1100	919
	3500K	AB Aged Brass	15.9W	1100	979
	3500K	BK Black	15.9W	1100	979
	4000K	AB Aged Brass	15.9W	1100	946
	4000K	BK Black	15.9W	1100	946

Example: **PL-36518-40-BK**

For custom requests please contact customs@modernforms.com

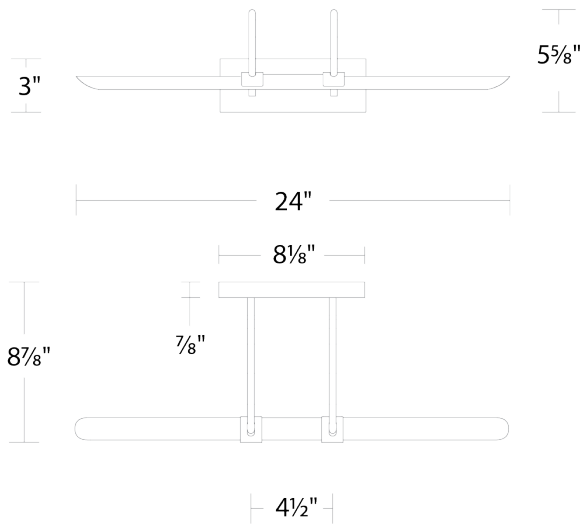

PL-36524

Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Ansel

PL-36524

PRODUCT DESCRIPTION

With its sleek, understated design, the Ansel picture light enhances your artwork without drawing attention to itself. The slim, tubular head rotates for precise lighting, allowing you to easily position the beam to perfectly illuminate your chosen piece with color temperature selectable LEDs. "

FEATURES

- Driver concealed within the canopy
- Rotatable light bar up to 70 degree to direct light as desired
- Conversion plate included to accommodate 4" junction box
- Trimless spackle cover available for 4" square junction box recessed in drywall thicknesses of 1/2", 5/8", 1", and 1-1/4"; accessory not included and can be ordered separately (model# MKCP-3040-WT)
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K

SPECIFICATIONS

Rated Life	50,000 Hours
Standards	ETL, cETL, Damp Location Listed
Input	120-277 VAC, 50/60Hz
Dimming	ELV: 100-10%, TRIAC: 100-10%
Color Temp	2700K, 3000K, 3500K, 4000K
CRI	90
Construction	Aluminum frame with acrylic diffuser

REPLACEMENT PARTS

HDW-SY25-MA - Hardware Pack
N/A - Hardware Pack

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
PL-36524 24"	2700K	AB Aged Brass	19.5W	1500	1186
	2700K	BK Black	19.5W	1500	1186
	3000K	AB Aged Brass	19.5W	1500	1260
	3000K	BK Black	19.5W	1500	1260
	3500K	AB Aged Brass	19.5W	1500	1324
	3500K	BK Black	19.5W	1500	1324
	4000K	AB Aged Brass	19.5W	1500	1306
	4000K	BK Black	19.5W	1500	1306

Example: **PL-36524-40-BK**

For custom requests please contact customs@modernforms.com



Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Ansel

PL-36530

PRODUCT DESCRIPTION

With its sleek, understated design, the Ansel picture light enhances your artwork without drawing attention to itself. The slim, tubular head rotates for precise lighting, allowing you to easily position the beam to perfectly illuminate your chosen piece with color temperature selectable LEDs. "

FEATURES


- Driver concealed within the canopy
- Rotatable light bar up to 70 degree to direct light as desired
- Conversion plate included to accommodate 4" junction box
- Trimless spackle cover available for 4" square junction box recessed in drywall thicknesses of 1/2", 5/8", 1", and 1-1/4"; accessory not included and can be ordered separately (model# MKCP-3040-WT)
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K

SPECIFICATIONS

Rated Life	50,000 Hours
Standards	ETL, cETL, Damp Location Listed
Input	120-277 VAC, 50/60Hz
Dimming	ELV: 100-10%, TRIAC: 100-10%
Color Temp	2700K, 3000K, 4000K, 3500K
CRI	90
Construction	Aluminum frame with acrylic diffuser

REPLACEMENT PARTS

HDW-SY25-MA - Hardware Pack
N/A - Hardware Pack

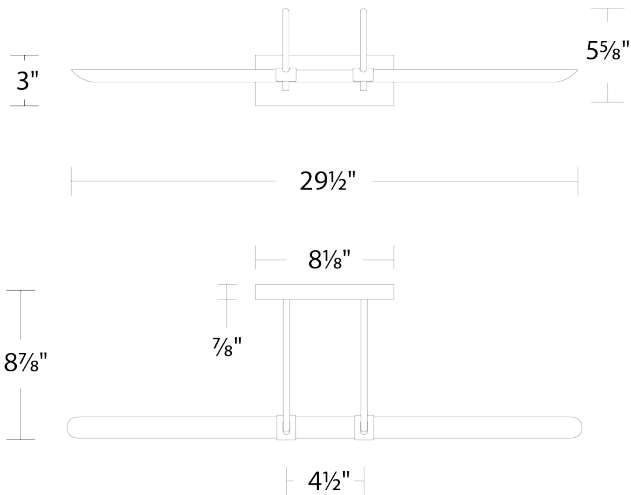

PL-36530

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
PL-36530 30"	2700K	AB Aged Brass	25.5W	1900	1498
	2700K	BK Black	25.5W	1900	1498
	3000K	AB Aged Brass	25.5W	1900	1613
	3000K	BK Black	25.5W	1900	1613
	3500K	AB Aged Brass	25.5W	1900	1685
	3500K	BK Black	25.5W	1900	1685
	4000K	AB Aged Brass	25.5W	1900	1661
	4000K	BK Black	25.5W	1900	1661

Example: **PL-36530-40-BK**

For custom requests please contact customs@modernforms.com