

WAC LIGHTING

Peekaboo

Bath & Wall 3000K

Fixture Type:

Catalog Number:

Project:

Location:

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-83422 22"	2700K/3000K/3500K/4000K	BK/AB Black/Aged Brass BK/BN Black/Brushed Nickel	20 W	1006 1765	833 1272

Example: **WS-83422-BK/BN**

For custom requests please contact customs@waclighting.com

DESCRIPTION

Plane geometry. This layered design features a sleek, illuminated rectangle punctuated by an opaque square, bringing substance to style.

FEATURES

- Diffused omnidirectional illumination
- Interchangeable center plate, choose from aged brass or brushed nickel
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Driver concealed within the canopy



SPECIFICATIONS

Color Temp:	2700K/3000K/3500K/4000K
Input:	120-277V,50/60Hz
CRI	90
Dimming:	ELV: 100-10% , TRIAC: 100-5%
Rated Life:	50,000 Hours
Mounting:	Can be mounted on ceiling or wall in all orientations
Standards:	ETL, cETL, ADA, Damp Location Listed
Construction	Aluminum body, with acrylic diffuser

FINISHES:




Black/Aged
Brass



Black/Brushed
Nickel

LINE DRAWING

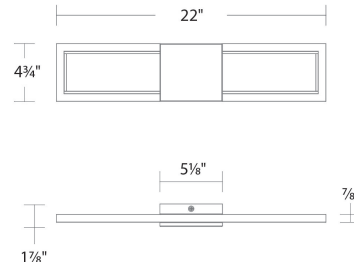

WS-83422

WAC LIGHTING

Peekaboo

Bath & Wall 3000K

Fixture Type:

Catalog Number:

Project:

Location:

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-83432 32"	2700K/3000K/3500K/4000K	BK/AB Black/Aged Brass BK/BN Black/Brushed Nickel	20 W	1006 1765	833 1272

Example: **WS-83432-BK/BN**

For custom requests please contact customs@waclighting.com

DESCRIPTION

Plane geometry. This layered design features a sleek, illuminated rectangle punctuated by an opaque square, bringing substance to style.

FEATURES

- Diffused omnidirectional illumination
- Interchangeable center plate, choose from aged brass or brushed nickel
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Driver concealed within the canopy



SPECIFICATIONS

Color Temp:	2700K/3000K/3500K/4000K
Input:	120-277V, 50/60Hz
CRI	90
Dimming:	ELV: 100-10% , TRIAC: 100-5%
Rated Life:	50,000 Hours
Mounting:	Can be mounted on ceiling or wall in all orientations
Standards:	ETL, cETL, ADA, Damp Location Listed
Construction	Aluminum body, with acrylic diffuser

FINISHES:




Black/Aged
Brass



Black/Brushed
Nickel

LINE DRAWING

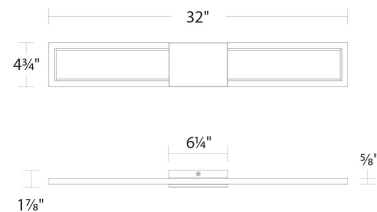

WS-83432