



Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Logo

FM-4407

PRODUCT DESCRIPTION

The ever versatile Logo works across a wide range of small and medium-sized spaces and spreads light evenly through edge-lit technology- that means no glare, no hot spots, only pure and perfect light.

FEATURES


- Driver installed within the Junction Box, driver dimension: 2.3" dia. x .8"
- 1" profile, edge-lit illumination
- Can be surface-mounted over a 3", 4" or 3/0-4/0 hybrid electrical box
- The integrated 120V driver is inside of fixture

SPECIFICATIONS

Rated Life	59000 Hours
Standards	ETL, cETL,Damp Location Listed,Title 24 JA8: 2019 Compliant
Input	120 VAC,50/60Hz
Driver Dimension	2.3" Dia. x .8"
Dimming	ELV: 100-10%,TRIAC: 100-5%
Mounting	Can be mounted on ceiling or wall in all orientations
Color Temp	3000K
CRI	90
Construction	Aluminum hardware, acrylic diffuser

REPLACEMENT PARTS

HDW-LX20-WA - Hardware Pack

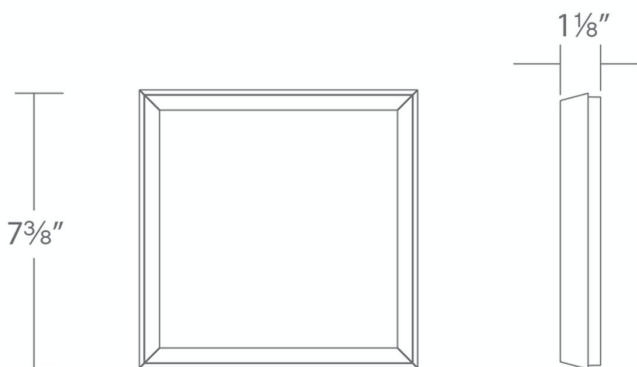

FM-4407

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
FM-4407 7"	3000K	WT White	15W	1200	1087

Example: **FM-4407-WT**

For custom requests please contact customs@modernforms.com